


Cellophane™ XS

Data

Features - General Purpose Film

Regenerated cellulose film (RCF), coated on both sides with a polyvinylidene chloride (PVdC) copolymer by a solvent process.

- Heat-sealable on both sides
- Excellent barrier to water vapour, gases and aromas
- Anti-static
- Resistant to oils and greases
- Both sides of the film are equally receptive to inks, adhesives and tear-tapes
- Excellent dead-fold characteristics
- High gloss and transparency
- Biodegradable base film

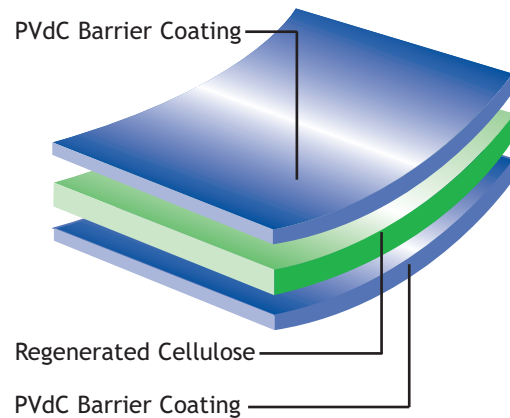

Applications

280/315XS Suitable for use as a single film or in laminate structures for overwrapping and form-fill-seal packaging.

340/365/440XS Generally used as a single film for medium to large packs on vertical or horizontal form-fill-seal machines. Particularly suitable for the packaging of snack foods, cereals, confectionery and other hygroscopic products.

500/600XS Suitable for use as a single film for heavy duty packaging, tear-tapes, etc.

XSC Coloured versions are available in certain grammages. Please refer to the Cellophane colour swatch for further details.

Technical Properties (Typical Values)

Property	Test Method	Test Conditions	Units	XS						
				280	315	340	365	440	500	600
Thickness	Innovia Films test		micron	19.4	21.9	23.6	25.4	30.6	34.7	41.7
Yield	Innovia Films test		m ² /kg g/m ²	35.7 28.0	31.7 31.5	29.4 34.0	27.4 36.5	22.7 44.0	20.0 50.0	16.7 60.0
Permeability to: Water vapour Oxygen	ASTM E 96	38°C 90% RH	g/m ² .24 hrs	10						
	ASTM F 1927	23°C 0-5% RH	cc/m ² .24 hrs. bar	3						
Optical: Gloss	ASTM D 2457	45°	units	105						
Haze (wide angle)	ASTM D 1003	2.5°	%	4						
Coefficient of friction (film to film)	ASTM D 1894	Static Dynamic		0.25 0.20						
			Tensile strength	ASTM D 882		MN/m ²	MD TD	125 70		
Elongation at break	ASTM D 882		%	MD TD	22 70					
Elasticity modulus (1% secant)	ASTM D 882		MN/m ²	MD TD	>3000 >1500					
Sealing range	Innovia Films test	0.5 secs; 69 kN/m ²	°C	100-160						
Seal strength	Innovia Films test	135°C; 0.5 secs; 69 kN/m ²	g(f)/38mm	225						

All properties are tested under standard laboratory conditions: 23± 2°C; 50±5% RH, unless otherwise stated.

MD Machine Direction TD Transverse Direction

Reel Specifications

Nominal Reel Diameters

Film	Length/(metres)			
	1900	3800	7600	11400
280XS	1900	3800	7600	11400
315XS	1700	3400	6800	10200
340XS	1600	3200	6400	9600
365XS	1450	2900	5800	8700
440XS	1200	2400	4800	7200
500XS	1050	2100	4200	6300
600XS	900	1800	3600	5400
Outside Diameter for 77mm Core	240mm	330mm	450mm	ns
Outside Diameter for 153mm Core	ns	355mm	475mm	570mm

ns = non-standard

Other reel lengths are available subject to negotiation.

Sheets

We can provide sheets to a range of sizes and shapes upon request.

Film Storage

To maintain the high quality of this product during storage it is recommended that Cellophane XS should be stored in its original wrapping away from any source of local heating or direct sunlight.

Recommended conditions of storage are:

Temperature: 17-23°C

Relative Humidity: 35-55%

Cellophane XS is suitable for use for 6 months from the date of delivery and stocks should be used in rotation.

Films should be allowed to reach operating room temperatures for 24 hours before use.

Food Contact

Cellophane XS is suitable for most applications involving direct contact with foodstuffs. Cellophane XSC is suitable for applications involving direct food contact provided EC Regulation No. 1935/2004 (Article 3) and EC Directive 93/10/EEC (Article 2 [2]) are satisfied. For specific enquiries, please refer to literature reference A120 or contact our Technical Services Department.

Health & Safety Guidelines

For Health and Safety information, please refer to literature reference A190.



www.innoviafilms.com
 email: filmsinfo@innoviafilms.com
 ™Trademark of Innovia Films Group

Sales Offices

Europe (UK)	Tel +44 (0)16973 42281
Americas (USA)	Tel +1 877 822 3456
Asia-Pacific (Aus)	Tel +61 3 9303 0600

Disclaimer: Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated.

The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform his own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.